

Article

Small Kaplan Turbines Cause Lethal Injuries to Fish Populations During Downstream Passage

Francisco Javier Sanz-Ronda ^{1,*} , Juan Francisco Fuentes-Pérez ¹ , Ana García-Vega ¹ , Jorge Valbuena-Castro ^{1,2} , Juan de María-Arnaiz ^{1,2} and Francisco Javier Bravo-Córdoba ^{1,2,*} 

¹ Group of Applied Ecohydraulics, Sustainable Forest Management Research Institute, Department of Agricultural and Forest Engineering, University of Valladolid, ETSIIAA, Avenida de Madrid 44, Campus La Yutera, 34004 Palencia, Spain; juanfrancisco.fuentes@uva.es (J.F.F.-P.); ana.garcia.vega@uva.es (A.G.-V.); jorge.valbuena@uva.es (J.V.-C.); juan.maria@uva.es (J.d.M.-A.)

² Centro Tecnológico Agrario y Agroalimentario ITAGRA.CT, Avenida de Madrid 44, Campus La Yutera, 34004 Palencia, Spain

* Correspondence: jsanz@uva.es (F.J.S.-R.); fjbravo@itagra.com (F.J.B.-C.)

Abstract

Fish passage through turbines is one of the main environmental impacts of hydropower. Turbine type is a key factor influencing fish survival, and widespread Kaplan turbines are generally considered less dangerous than other turbine types. Nevertheless, while large Kaplan turbines have been extensively studied, there is limited empirical evidence about the biological impact of small, high-speed Kaplan turbines on fish survival. In this study, we conducted controlled in situ fish experiments at a small and low-head hydropower plant (1 MW; head 8 m) using balloon tags and pressure sensors to quantify real mortality in two horizontal Kaplan turbines operating at full capacity: one small turbine (1.2 m Ø, 500 rpm, and 5 m³/s) and one larger unit (1.55 m Ø, 300 rpm, and 8 m³/s). Fish (95–190 mm) were released into the intake flow and monitored post-passage. Results showed higher mortality in the small turbine, with ~80% in 24 h, many exhibiting severe mechanical injuries such as complete sectioning of the head or spinal cord, with significantly higher mortality in larger fish. In contrast, the larger turbine showed a ~60% mortality rate and fewer traumatic injuries. Our findings highlight the underestimated impact of small, high-rpm Kaplan turbines on fish survival and underscore the need for adaptive turbine operation or structural modifications to minimize ecological damage during critical migration periods.

Keywords: Kaplan turbine; fish mortality; balloon tag; downstream migration; smolts; salmonids; hydropower impact



Academic Editors: Dong Liu and Yanhe Xu

Received: 23 December 2025

Revised: 11 January 2026

Accepted: 16 January 2026

Published: 21 January 2026

Copyright: © 2026 by the authors.

Licensee MDPI, Basel, Switzerland.

This article is an open access article distributed under the terms and conditions of the [Creative Commons Attribution \(CC BY\)](https://creativecommons.org/licenses/by/4.0/) license.

1. Introduction

Free and safe downstream movements are necessary for fish conservation [1,2]. Downstream migration is a vital process for diadromous fish species, and it is also a key factor for fitness in potamodromous species that only move within freshwater systems [3]. For diadromous fishes, the on-time descent to estuarine or marine habitats marks a key life stage, often tied to reproduction or maturation, while potamodromous species require longitudinal connectivity, whether by seasonal habitat use or gene flow. Despite its ecological relevance, downstream migration has historically received less attention in impact assessments compared to upstream movements. This bias persists in regulatory frameworks and mitigation efforts, which often prioritize fishways for upstream movements [4,5].

Consequently, the hazards associated with diversion channel entrainment, turbine passage, and lack of effective downstream routes and solutions remain underestimated.

Although upstream fishways can occasionally be used for downward passage [1,5], fish moving downstream who encounter a dam face two main pathways: falling over the spillway or being drawn into diversion devices (canals, pipes, and/or turbines). Dams and weirs are rarely equipped with specific devices for bypassing downstream obstacles, such as protective screens (physical, mechanical, and/or behavioral) that avoid the entry into facilities (diversion canals or turbines) or guiding structures to safety bypasses (e.g., sluices) [6]. Spillway routes can be relatively safe when the drop is moderate and tailwater depth is sufficient to avoid traumatic impact [7]. However, when the diversion takes the most discharge and there are no protective screens, many fish may not detect the spillway, and they are funneled into intake structures. This can lead to entering irrigation, water supply, or hydropower canals/pipes, causing migratory delays and substantially increasing the risk of mechanical and physiological injuries [8–10].

In the case of hydroelectric power plants (HPPs), passage through turbines usually becomes the only or most likely alternative for fish moving downstream. It exposes individuals to several stressors: sudden pressure changes (rapid decompression, even cavitation), fluid shear and turbulence, caused by high turbulent flow, and mechanical strike, mainly from mobile turbine runner blades or stay vanes, wicket gates, and screens [11] (Figure 1). Rapid decompression can exceed physiological tolerances, leading to barotrauma, especially in physoclistous species (fish with swim bladders not connected to the digestive tract, meaning that swim bladder gases are slowly dissolved into the blood) [11,12]. Shear forces disrupt fish equilibrium and cause internal damage [13–15], and direct blade strike remains one of the most severe causes of mortality, particularly at high rotational speeds [15]. These stressors may act independently or synergistically, increasing the cumulative mortality risk. Average worldwide fish mortality from hydroelectric turbine passage was estimated at 22.3% [16]. However, fish mortality rates vary widely depending on the turbine (type, diameter, runner speed, shape, and number of blades), operating conditions (flow and head), and fish characteristics (size and species-specific traits). Studies show that large-bodied fish and physoclistous species are particularly susceptible to turbine-induced injuries [4,7], while larger and lower-head operating Kaplan turbines are known to be less dangerous than common Francis turbines [17].

Kaplan turbines represent one of the most widely implemented turbine types in hydropower plants worldwide since the early 20th century [18]. These propeller-type turbines feature both adjustable runner blades and wicket gates (Figure 1), making them double-regulated machines that operate at a constant rotational speed. This design enables high efficiency, particularly in low-head hydropower applications (2–20 m) and lower discharge (1–100 m³/s) [19]. Kaplan turbines can be installed in various configurations, including both vertical and horizontal orientations, depending on site-specific requirements. For lower head drop (2–10 m) and lower discharge (1–10 m³/s), these turbines are configured with small diameters (<2 m) to work at high rotational speeds (more than 300 rpm) to reach optimal energy production (0.1–2 MW) [20,21]. Small and high-speed Kaplan turbines are also used as a complement to larger turbine installations to work with base/ecological flows or in low-river-discharge conditions. Thus, their combined use is common in the lower reach of rivers and/or streams with high seasonal flow variations. For instance, in the case of small HPPs (<10 MW) in Spain, Kaplan turbines are estimated at 37–42% of the total turbines, and of these, high-speed turbines account for around 30–40% [22,23].

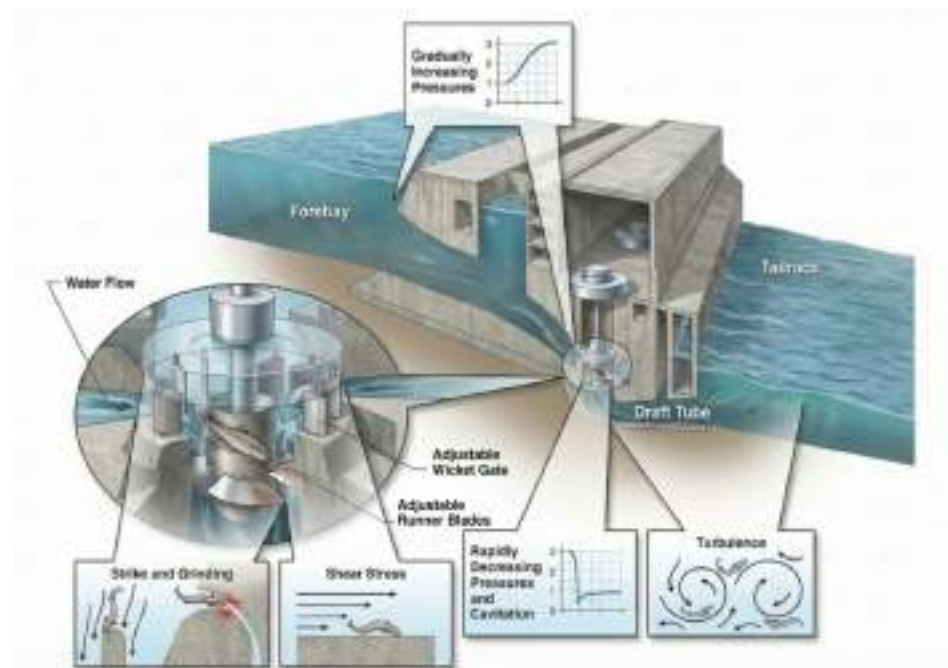


Figure 1. Schematic of a Kaplan turbine illustrating potential fish injury zones. Adapted from [24], originally based on [11].

To assess fish passage mortality through turbines, various predictive tools have been developed. Examples include deterministic blade strike models [25–27], which only estimate fish collision and its derived mortality; empirical models, such as those by [28], which rely on direct observed injury patterns related to turbine, flow, and fish features; and more complex numerical models such as BioPA (Biological Performance Assessment Tool), which uses computational fluid dynamics (CFD) models to estimate the likelihood that a fish will be exposed to a stressor at a specific magnitude and applies the biological response models to estimate the probability of injury or mortality [15]. However, previous models were mainly tested and calibrated using data from large Kaplan or Francis turbines and may not adequately reflect the hydraulic conditions of small, high-rpm units.

Kaplan turbines have generally been associated with moderate mortality rates when operated at low rotational speeds (under 300 rpm) [29], but injury rates can rise sharply under higher velocities or smaller diameters [7]. Nevertheless, despite the widespread use of small and high-rpm Kaplan turbines, no studies have directly verified their biological impact [4,7,30]. Consequently, many operators and environmental authorities assume a low ecological risk for smaller Kaplan turbines based on models calibrated for slower, larger turbines. This may lead to underestimation of injury and mortality rates, neglecting key differences in design and hydraulics.

Therefore, this study hypothesizes that fish mortality in small and high-rpm Kaplan turbines is underestimated. Thus, we aim to empirically test the mortality range caused by such Kaplan turbines on fish during downstream migration as a first approximation of their potential damage. The findings will help refine environmental risk assessments and promote more accurate ecological evaluations of small hydropower installations.

2. Materials and Methods

2.1. Ethical Statement

All fish experiments were performed following European Union ethical guidelines (Directive 2010/63/UE) and Spanish Act RD 53/2013 and RD 118/2021, with the approval of the competent Spanish authorities (Regional Government of Navarra and University

of Valladolid: Code 12107335). All field work was carried out with the permission of the regional fisheries service and water management authorities. Experiments and procedures were adopted to minimize fish stress and avoid unnecessary damage. Animal welfare principles of replacement, reduction, and refinement [31] were strictly applied in the experimental design.

2.2. Study Site

Experiments were carried out at the most downstream HPP of the Bidasoa River, located at the village of Lesaka (Navarre, Spain). This infrastructure has a run-of-the-river configuration, with a net head of 8 m (ranging from 7.8 to 8.2 m depending on river discharge) and an installed capacity of 1 MW. It includes two different sizes of horizontal Kaplan turbines: a smaller unit (T1) of 1.20 m diameter to operate under low-flow conditions (4 blades, 500 rpm, 5 m³/s, and 0.34 MW) and a larger unit (T2) of 1.55 m diameter (4 blades, 300 rpm, 8 m³/s, and 0.66 MW), which serves as the main working unit. Flow stems from a 2 m tall dam and a diversion canal of 560 m. There is a fishway for upstream migration but no downstream migration facility to avoid fish entering the intake canal. The mean annual discharge in the river reach is 24.3 m³/s and the mean annual water temperature is 13.2 °C [32]. According to physical and chemical analysis, water quality is “very good” based on Spanish Act RD 817/2015.

The HPP is 12 km upstream of the sea and its dam is the first barrier for ascending fish. Atlantic salmon (*Salmo salar* Linnaeus, 1758) is the most emblematic species in the Bidasoa basin. There, salmon is in the southern limit of its natural distribution range [33,34], with a population nearing extinction, threatened mainly by HPPs and global warming [35]. It is estimated that more than 27% of salmon smolts pass through the turbines of this HPP during their downstream migration to the sea [36]. This proportion could be higher in climate scenarios characterized by an increasing frequency of low-flow conditions.

Fish assemblages in this area also include other diadromous species, such as sea brown trout (*Salmo trutta* Linnaeus, 1758), European eel (*Anguilla Anguilla* Linnaeus, 1758), sea lamprey (*Petromyzon marinus* Linnaeus, 1758), and Allis shad (*Alosa alosa* Linnaeus, 1758), and potamodromous species such as riverine brown trout (*Salmo trutta*), Ebro nase (*Parachondrostoma miegii* Steindachner, 1866), Pyrenean gudgeon (*Gobio lozanoi* Doadrio & Madeira, 2004), Pyrenean minnow (*Phoxinus bigerri* Kottelat, 2007), and stone loach (*Barbatula barbatula* Linnaeus, 1758) [37].

2.3. Experimental Design

The experiment consisted of passing a group of Atlantic salmon smolts ($n \approx 20$) through each of the two turbines, operating at 100% of their nominal discharge. As the objective was to estimate a prior mortality range, releasing a sufficient number of tagged smolts per trial ($n_t = 20$) and expecting at least a 50% recapture rate [38] ($n_r \approx 10$) allowed a statistically reliable prior estimate of the turbine-passage mortality range, while complying with reduction and refinement principles by minimizing the total number of fish required for robust inference [39,40].

Because the turbines operate at a constant rotational speed, the most favorable scenario for fish passage occurs when running at 100% capacity. At full discharge, the wicket gates and the gaps between runner blades are maximally open, reducing the probability of blade strike, whereas rapid decompression and shear-related stressors remain relatively stable [25]. For animal welfare reasons, if mortality exceeded 50% under this most favorable condition, the experiment would be discontinued and no more groups/trials operating with a lower discharge and more harmful conditions would be established.

Experiments were carried out in April 2025. All tested smolts came from the Mugaire fish farm (fork length: 95–190 mm, a representative distribution of salmon smolt cohorts in the Bidasoa basin [36]) (Table 1), avoiding the use of wild stocks. Fish were acclimated for 2 h to local river conditions and subsequently anesthetized (50 mg/L of eugenol diluted in ethyl alcohol), sized (fork length ± 1 mm), and tagged. Immediately thereafter, they were released into the intake turbine flow chamber, recovered after turbine passage by a kayak and hand net, and finally monitored 24 h post-passage in a perforated box placed inside the river. Potential site-specific handling stress related to local water conditions (e.g., temperature, turbidity, and conductivity) was minimized by conducting all trials within a narrow temporal window under stable hydrological conditions and by using standard sedation, tagging, and recovery procedures.

Table 1. Fish sample (*Salmo salar* smolts). SD: Standard Deviation.

Turbine	N	Fork Length (mm) *	
		Mean $\pm$ SD	Range
T1 ($\varnothing$: 1.20 m)	20	153 $\pm$ 14	95–190
T2 ($\varnothing$: 1.50 m)	20	161 $\pm$ 7	130–190

Note: * No statistically significant differences were found between groups (data normally distributed; mean comparison test, $p = 0.253$).

Balloon tags were used as the method for recapturing fish after their passage through the turbines, as this technique is considered one of the least harmful options (e.g., compared with net capture) [41]. Two balloons were attached to the fish by anchoring small hooks at the mouth, one in the upper jaw and the other in the lower jaw (Figure 2). Inside each balloon, two reaction capsules were inserted containing 1 g of oxalic acid dihydrate and sodium bicarbonate in a 1.4:2 ratio. These capsules were activated at the moment of release by injecting 5 mL of water at approximately 40 °C. The balloons were sealed with a custom-made plug (liquid silicone used for mold casting), through which the activation water was injected. The connection between the balloon and the plug was secured with an O-ring, and the connection between the balloon and the hook was made using braided fishing line [42,43].



Figure 2. Tagging and injection with balloon tags. (Left) equipment overview. (Center) Injection pipe with pressure tag ready for release. (Right) Salmon smolt tagged with two balloon tags.

Fish were introduced into the turbines through an opening located immediately downstream of the gates of the intake chamber. A PVC pipe, fixed to the gate structure,

extended to the suction zone of the turbines (Figure 2). Using a homemade manual plunger, each fish was gently pushed until it was drawn into the water column. Observers were stationed both in the intake chamber—to verify whether fish floated away without being suctioned—and at the turbine outflow, to provide guidance to the kayaker.

To complement the information collected while reducing the number of individuals used, one barotrauma detection probe per turbine was injected to obtain a detailed pressure profile during passage through the facilities. This probe is based on the Sentinel board architecture [44], (developed by Universidad de Valladolid, Palencia, Spain), powered by an ESP32 microcontroller (Espressif Systems, Shanghai, China). To capture the rapid hydraulic transients characteristic of turbine passage, the unit features a TE Connectivity MS5837-30BA pressure sensor (TE Connectivity Ltd., Schaffhausen, Switzerland), configured to log high-resolution data at 50 Hz.

Beyond pressure monitoring, the device can be used to characterize physical trauma (shear, strikes, and turbulence) using an Adafruit BNO055 9-DOF Absolute Orientation Sensor (Adafruit, Brooklyn, NY, USA) [45], which integrates a triaxial accelerometer, gyroscope, and magnetometer. Data is synchronized via an onboard RTC (Real-Time Clock) and sent to a high-speed data storage unit. The electronics are powered by a lithium battery with a dedicated charge management system and status LED. For structural integrity, the 3D-printed housing is fully encapsulated in 3M Scotchcast™ Resin 40 (3M Company, Maplewood, MN, USA) a flexible polyurethane potting compound that ensures IP68 waterproofing and exceptional shock absorption against mechanical impact.

2.4. Data Processing

2.4.1. Mortality

Mortality (M) was calculated using the following expression: (Equation (1) [38]. First, the experimental mortality (M_e) was determined as the ratio between the number of fish found dead within 24 h after passage through the turbines and the total number of recovered fish. All fish that died, both immediately after passage and within 24 h, were necropsied to determine the cause of death. Live fish were also carefully examined for potential injuries. Those with a high likelihood of survival were returned to the river, while individuals with poor survival prospects were euthanized using a high dose of MS-222.

$$M = \frac{M_e - M_c}{1 - M_c} \quad (1)$$

Fish handling, tagging, transport, and recapture may significantly affect post-passage mortality. For this reason, turbine-passage studies commonly include a control group to distinguish handling-related mortality from mortality caused specifically by turbine passage. In this context, the mortality in the control group (M_c) is defined as the proportion of tagged control fish released in the turbine outlet that died after 24 h, relative to the total number of recovered fish. A live site-specific control group was not implemented due to ethical constraints associated with handling a threatened species and the logistical infeasibility of reproducing comparable handling and hydraulic conditions without turbine exposure. Instead, a targeted literature review was conducted to identify an appropriate range of control-group mortality values consistent with the characteristics of our experimental design.

Reported control mortality using balloon-tag studies ranges from <5% for alosines [40] and Chinook salmon smolts [39] to <10% for pike and North American percids [41] and up to 14.6–22.4% for rainbow trout smolts [38]. Based on this, control mortality (M_c) values of 5% and 20% were selected to represent conservative and precautionary scenarios, respectively.

The confidence interval (CI 95%) was obtained through the standard error (SE), calculated using Equation (2) [38], where $S_e = 1 - M_e$; $S_c = 1 - M_c$; N_e is the number of deployed fish in the experiment; and N_c is a hypothetical control sample size (considered equal to the number of deployed fish in the theoretical control $N_e = N_c = 20$).

$$SE(\hat{M}) = \frac{1}{S_c} \cdot \sqrt{\frac{M_e \cdot S_e}{N_e} + (1 - M)^2 \cdot \frac{M_c \cdot S_c}{N_c}} \quad (2)$$

Accordingly, the resulting CI should be interpreted as a sensitivity interval conditional on the assumed control mortality, rather than as an inference based on an observed control group.

2.4.2. Pressure Profile

In addition to being represented as the temporal variation in pressure values, the information recorded by the pressure tags is intended to provide a predictor of potential turbine-induced barotrauma. For this purpose, the Ratio of Pressure Change (RPC) [12,15] was applied. This ratio is calculated as the fish's acclimation pressure before turbine entry divided by the nadir pressure, defined as the minimum absolute pressure experienced by the fish during turbine passage. Lower nadir pressures combined with higher acclimation pressures increase the risk of barotrauma [46], and RPC values equal to or below 2.5 (i.e., a nadir pressure at least 40% of the acclimation pressure) have been suggested to be “fish-friendly” [47].

2.5. Data Analysis

To compare fish fork length between groups (T1 and T2), a two-sample Student's *t*-test was applied after verifying that sample size and distributional assumptions supported the use of a parametric test. The normality of the sample was evaluated based on skewness and kurtosis (± 2 considered as acceptable).

Differences in mortality proportions between turbines, both immediately and 24 h after turbine passage, were evaluated using Fisher's exact test. To evaluate whether fish length influenced mortality outcomes, the Mann–Whitney U test was used to compare median fork lengths between surviving and dead individuals, as sample sizes were small and normality could not be assumed within outcome groups. In addition, differences in mean mortality between turbines were assessed using Welch's *t*-test, which does not assume equal variances and is therefore appropriate for groups with heterogeneous variance or sample size. Significance was evaluated at $\alpha = 0.05$.

During the preparation of this manuscript, the authors used Gemini 3 Pro (Google LLC, Mountain View, CA, USA) and ChatGPT 5.2 (OpenAI, San Francisco, CA, USA) to assist with language editing, figure formatting, and the rephrasing of text. All scientific content, data analysis, and interpretation were performed by the authors.

3. Results

3.1. Mortality

(a) Experimental mortality (M_e)

Following turbine passage, 11/20 fish from T1 and 9/20 from T2 were recovered downstream. The experimental mortality 24 h after turbine passage was approximately 82% for T1 and 67% for T2. In the case of T1, slightly more than half of the fish died immediately after passing through the turbines, whereas for T2 the majority died within the following 24 h. Overall, decapitation was the most frequently observed injury, although

other types of damage were also detected, including internal trauma (stomach and spinal column) and embolism in the ocular system (Table 2).

Table 2. Estimated mortality (M_e), with details of the smolts recovered after passing through the turbines, including details of their condition at the time and after 24 h, as well as the cause of death and the type of injury.

Turbine	Fork Length (mm)	Just After Turbine Passage	After 24 h	Cause of Death	Injury Type	M_e Just After Turbine Passage	M_e After 24 h
T1	150	Dead		Turbine passage	Decapitation	45.5% * (5/11)	81.8% * (9/11)
	158	Dead		Turbine passage	Decapitation		
	178	Dead		Turbine passage	Decapitation		
	164	Dead		Turbine passage	Decapitation		
	170	Dead		Turbine passage	Decapitation		
	190	Alive	Dead	Turbine passage	Stomach rupture		
	115	Alive	Dead	Turbine passage	Eye embolism		
	180	Alive	Dead	Undetermined			
	185	Alive	Dead	Undetermined			
	95	Alive	Alive				
	105	Alive	Alive				
T2	175	Dead	Dead	Turbine passage	Decapitation	11.1% * (1/9)	66.7% * (6/9)
	155	Alive	Dead	Turbine passage	Eye embolism		
	178	Alive	Dead	Turbine passage	Stomach rupture		
	160	Alive	Dead	Turbine passage	Spinal cord brake		
	190	Alive	Dead	Undetermined			
	170	Alive	Dead	Undetermined			
	150	Alive	Alive				
	182	Alive	Alive				
	176	Alive	Alive				

Note: * No statistically significant differences were found between turbines either immediately or 24 h after turbine passage (Fisher's exact test; $p > 0.150$).

Based on these results, and in accordance with animal welfare and ethical principles, it was decided not to conduct additional experimental replicates.

Fish length influenced mortality outcomes following turbine passage. As shown in Figure 3, for turbine T1, individuals classified as dead were significantly larger than those that survived, with survival restricted to smaller fish (<110 mm fork length).

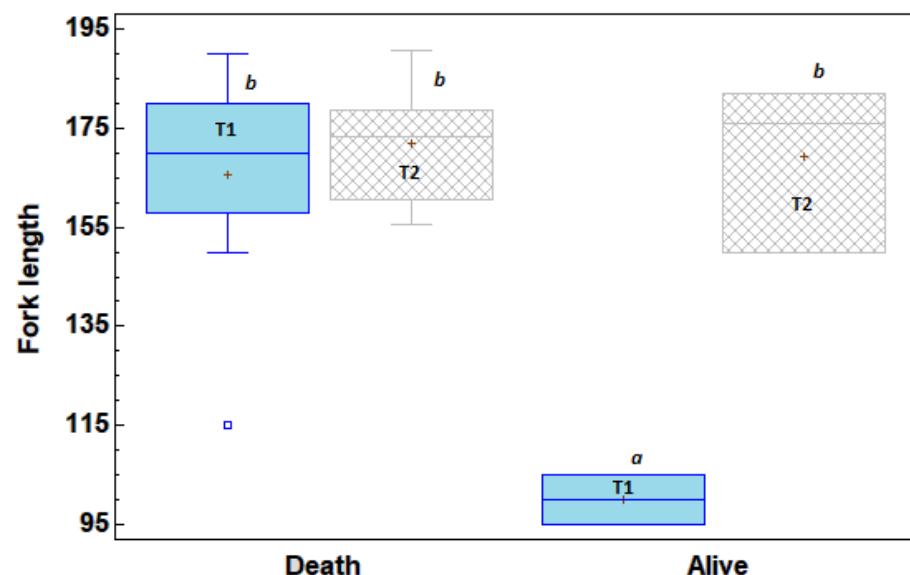


Figure 3. Box plot and length comparison based on whether fish were dead or alive after 24 h of passing through the turbines (T1: small turbine—blue plot; T2: large turbine—grey plot). Different letters above the box plots indicate statistically significant differences between groups based on pairwise comparisons (Mann–Whitney U test, $p = 0.045$). “+” symbol represents mean value.

(b) Mortality (M)

According to the results for experimental mortality (M_e) and the selected reference values for control mortality (M_c), 95% confidence intervals for final mortality (M) were estimated (Table 3). Final mortality exceeded 50% in both turbines and, although differences were not statistically significant due to high variability and overlapping confidence intervals, values were higher for turbine T1.

Table 3. Mortality (M), standard error (SE) and confidence interval (CI), based on the two selected control mortality values (M_c). Calculated according to Equations (1) and (2).

MORTALITY ($M \pm SE$)	$M_c = 5\%$			$M_c = 20\%$		
	M (%)	SE	CI (95%)	M (%)	SE	IC (95%)
T1 *	80.9	10.8	56.8–100	77.3	11.1	52.6–100
T2 *	64.9	9.9	42.1–87.7	58.3	10.8	33.4–83.2

Note: * No statistically significant differences were detected in final mortality between turbines (Welch's t -test: if $M_c = 5\%$, $t = 1.092$; $p = 0.290$. If $M_c = 20\%$, $t = 1.228$; $p = 0.235$).

3.2. Pressure Profile

Recovery of sensors released (two per turbine) with readable data proved to be highly challenging, likely because the devices remained trapped or stationary within the draft tube due to intense turbulence and buoyancy effects (Figure 3). As a result, usable pressure records were obtained only for turbine T1.

Pressure records from turbine T1 (Figure 4) indicated an acclimation pressure of 100.5 kPa, corresponding to fish swimming near the water surface prior to turbine entry. The maximum recorded pressure reached 160.1 kPa, while the mean nadir pressure (i.e., minimum pressure experienced) was 49.9 kPa. Notably, an extreme minimum nadir pressure as low as 5.92 kPa was also recorded.

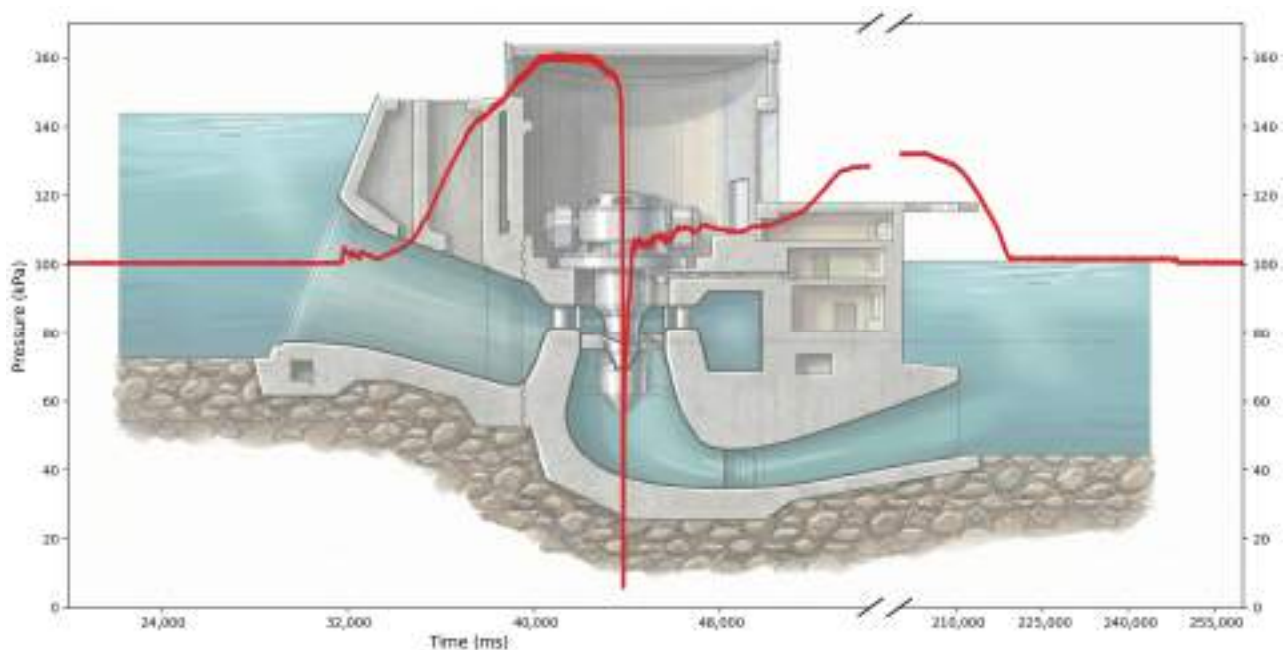


Figure 4. Pressure profile recorded during the passage path through the Kaplan turbine exhibiting the lowest nadir pressure. Note that the time axis includes a break to exclude a static period during which the sensor remained stationary in the draft tube, thereby highlighting pressure changes during turbine passage.

Based on the mean pressure data, the resulting ratio of pressure change (RPC) was approximately 2.04 (100.5/49.9). However, fish passing close to the blade tips may ex-

perience substantially lower nadir pressures, such as 5.92 kPa, resulting in an RPC of approximately 17.

4. Discussion

Small Kaplan turbines with high rotational speeds are widely deployed in river systems experiencing seasonal flow variation and commonly serve as support for larger generation units. These turbines are typically installed in low-head, mainstem reaches, where their productivity is greatest. In regions such as Spain, small and high-speed Kaplan units comprise an estimated ~15% of all installed turbines [22,23], highlighting their widespread application in medium and large river networks. Despite their growing prevalence, environmental assessments for these systems frequently rely on data and risk models derived from larger, slower-turning turbines, often presuming a limited biological impact on fish downstream passage based on extrapolation rather than site-specific evidence.

This work assesses fish passage survival through two of those turbines. All studied fish were Atlantic salmon smolts within a size range representative of the downstream-migrating cohort in the river. The species and limited number of individuals tested reflect ethical constraints inherent to experimental work on threatened migratory fishes. Thus, the limited sample size resulted in relatively wide confidence intervals and prevented the detection of statistically significant differences in mortality between the two turbines. Nevertheless, survival appeared to be restricted to fish smaller than 110 mm (lower than 10% in a smolt cohort population [36]) in turbine T1, whereas larger individuals were able to survive passage only through turbine T2. Given the substantial physical differences between the two turbines, clearer contrasts in mortality would have been expected, with higher mortality rates anticipated in T1 compared to T2 [15,48]. Consequently, our results provide empirical evidence that small, high-rotational-speed Kaplan turbines pose a severe threat to downstream-migrating Atlantic salmon smolts. Even so, our conclusions should not be interpreted as universally applicable across species or life stages. The results could only be cautiously extrapolated to similarly sized physostomous and fusiform fish. Instead, the strength of this study lies in combining direct empirical evidence with a comparison to the broad body of turbine-passage literature, allowing inference beyond the immediate experimental sample.

Contrary to the general assumption that Kaplan turbines are relatively “fish-friendly” compared to Francis turbines—an assumption mostly based on studies of large, slow-rotating units [17,18]—we also observed high mortality rates among them. The small turbine (T1, 500 rpm) resulted in a mean final mortality of nearly 80%, while the larger unit (T2, 300 rpm) showed a mortality greater than 50%, with both under full-flow operating conditions, the most favorable hydraulic scenario for fish survival [25]. These values far exceed the global mean turbine-passage mortality ($\approx 22\%$; [16]) and the typical $<10\text{--}15\%$ expected for smolts in larger Kaplan turbines in small HPPs [29,38] and large-scale HPP Kaplan installations [4,39]. However, our findings align more closely with recent assessments of small hydropower plants, which suggest that mortality can rise sharply in facilities with narrower runners and higher rotational speeds [49], highlighting a major gap in current environmental impact assumptions for small hydropower plants.

The predominance of severe mechanical injuries—complete sectioning of the head or trunk—indicates that blade strike was the dominant mortality mechanism, mainly in the higher speed T1. This is consistent with deterministic models predicting steep increases in strike probability with decreasing runner diameter and increasing rotational speed [25–27], particularly when blade count is high and gaps are narrow.

Beyond mechanical trauma, barotrauma also contributed to mortality. Our mean nadir pressure recorded in turbine T1 (≈ 49 kPa) was in accordance with reported values from

Kaplan turbines with a similar head [50]. Although it produced an RPC of ≈ 2.0 —typically interpreted as a “low risk” of mortality associated with rapid decompression in published thresholds [12,47]—several fish exhibited injuries consistent with decompression (ocular hemorrhage and intestinal rupture). Importantly, the minimum recorded nadir pressure (5.92 kPa) is physically near water vapor pressure, implying extreme localized pressure drops likely occurring near blade leading edges or tip vortices, where the lowest pressure zones are predicted [50,51]. In such regions, the RPC can exceed 3.0, a level associated with >20–40% barotrauma-related injury in salmonids [15,50], and may even reach values around 17.0, which have been associated with immediate barotrauma-induced mortality [15]. Our finding that at least 4 out of 14 fish with a known cause of death showed barotrauma-compatible lesions supports this interpretation. Nevertheless, barotrauma injuries could be higher, because they are hindered by previous blade strikes and fish-sectioning mortality. Nadir pressures in turbine T2 are expected to be higher than those observed in T1, owing to its larger runner diameter and lower rotational speed, as previously reported by [48].

In the case of shear forces, they are known to occur within wicket-gate wakes, tip vortices, and inter-blade acceleration zones; however, their biological effects could not be determined in this study. Shear-related injuries are typically difficult to isolate from strike and decompression trauma, and published thresholds are derived almost exclusively from laboratory flumes rather than from Kaplan runners [15,25]. Direct quantification of shear stress was not possible in our study due to the absence of in situ measurements or turbine-specific CFD simulations. Nevertheless, studies of Kaplan turbines operating at similar rotational speeds suggest localized peak shear rates on the order of 8×10^3 – $3 \times 10^4 \text{ s}^{-1}$, but the lack of turbine-specific hydraulic data precludes quantifying shear exposure experienced by individual fish [25,51]. Consequently, the relative importance of shear in our turbines—both small, high-rpm units—remains uncertain and cannot be classified as either minor or substantial based on available evidence.

Fish forced-entry experiments generally amplify mortality caused by overall handling [52]. Moreover, strike and rapid decompression survival is influenced by volitional behavior, as fish can use physical or physiological responses to avoid or reduce those stressors. Thus, mortality may have been overestimated by handling stress inherent to sedation, tagging, forced turbine passage, and recapture—factors known to contribute 5–20% mortality in balloon-tagged fish [38–40]. Although the absence of a site-specific control group in our study introduces uncertainty regarding handling stress under local conditions, we adopted conservative literature-based mortality estimates and conducted trials under stable environmental conditions. Importantly, even when applying the upper bound of this conservative mortality range ($M_c = 20\%$), this does not alter the conclusion: both turbines, particularly the smaller unit T1, caused exceptionally high mortality far beyond what could be explained by handling alone.

The hydropower plant studied lies only 12 km from the sea, in a river reach where >27% of smolts from the whole river basin enter the diversion canal [36], with this proportion likely to increase in dry years. Once inside the long (560 m) canal, fish have limited ability to return, causing migration delay in the turbine’s intake area, which itself increases predation risk and reduces seaward arrival success [8–10]. Importantly, the small turbine (T1)—the most lethal—was also positioned in the main bulk-flow region of the intake chamber, making it the most likely path for migrating smolts. Moreover, immediate predation on surviving fish after turbine passage is expected to be significant due to injury-related impairment, disorientation, and reduced swimming performance, all of which markedly increase vulnerability to piscivorous fauna [6,18]. Because small Kaplan turbines often operate during the peak smolt migration season, their ecological influence extends beyond immediate mortality, potentially affecting entire cohorts.

The mainstem of the Bidasoa River basin consists of six small HPPs (three equipped with low–high-speed Kaplan turbines and the other three with Francis turbines) along a 41.6 km river reach. Hydraulic/mechanical guidance structures, behavioral barriers, and alternative bypass routes once inside the canals were absent at all HPPs, further increasing the turbine entrainment probability [6,36]. Therefore, the accumulative impact on salmon populations already near extinction at the edge of their biogeographical range [33–35] can be considered unacceptable from a conservation and management perspective. Furthermore, our study was centered on salmon smolts, but if impacts on adult salmon and riverine sea trout kelts (fish that return to sea after spawning), as well as on eels and lampreys, are considered, the expected mortality may far exceed 50% [4,7]. All these findings are unacceptable for anadromous fish conservation and underscore the broader ecological implications of small HPPs for fish assemblages in this basin.

Taken together, our empirical evidence supports the conclusion that small, high-rpm Kaplan turbines pose a disproportionately high risk to downstream fish migrants. Given their widespread use in low-head rivers across Europe and elsewhere, this issue deserves urgent attention. The implementation of effective downstream bypasses, physical or exclusion screens, behavioral guidance systems, and operational adjustments (e.g., shutting down small turbines during peak migrations) may significantly reduce mortality, as recommended in international best-practice guidelines [4,50].

Ultimately, the current regulatory assumption that “Kaplan turbines are safe” cannot be generalized across scales and rotational speeds. Our study shows that small, high-rpm Kaplan turbines represent a distinct hydraulic environment requiring specific assessment, monitoring, and mitigation. In this context, for future experiments, we have identified several aspects that should be improved and/or emphasized. We found that, when recovering balloon tags, using at least two individually identifiable balloons is essential in this type of facility due to the high likelihood of impact. It would also be advisable to place them at both the anterior and posterior ends of the fish to reliably distinguish fragments (the upper jaw proved to be a more secure anchoring site than the lower jaw). The fish and sensor injection system also warrants attention, as in cases where suction is not sufficiently strong, it is necessary to position the inlet as close to the turbine as possible. We also consider it crucial to perform replicated trials under different turbine operating regimes in order to confirm that the greatest damage occurs when these systems operate at full capacity. Finally, future studies should also incorporate the tracking of actively swimming fish, not only passive (sedated) individuals, to obtain a clearer understanding of processes occurring in the vicinity of these facilities [53].

5. Conclusions and Management Applications

This study shows that small, high-speed Kaplan turbines pose a far greater threat to downstream-migrating salmon smolts than generally assumed. Mortality exceeded 80% in the 1.20 m, 500 rpm turbine and approximately 60% in the 1.55 m, 300 rpm unit—values far above typical mortality reported for larger Kaplan turbines. Both data remain ecologically unacceptable and incompatible with the persistence of migrating smolts. Injuries were dominated by severe mechanical trauma, confirming blade strike as the primary mechanism, while internal lesions consistent with barotrauma were also observed, supported by measured nadir pressures and expected localized pressure extremes in small runners.

These findings challenge the widespread regulatory assumption that Kaplan turbines are relatively “fish-friendly,” showing instead that turbine diameter and rotational speed are critical predictors of mortality. Small, high-rpm units constitute a distinct hydraulic environment that is not well represented in existing empirical or mechanistic models, many of which underestimate strike probability and fail to capture extreme nadir pressure.

From a management perspective, the results emphasize the need to

- (i) Re-evaluate impact assessments, explicitly incorporating turbine size and rpm;
- (ii) Implement guidance or exclusion systems in diversion canals to prevent turbine entrainment;
- (iii) Adopt operational measures, such as shutting down turbines during peak migration periods;
- (iv) Demand improved modeling or field measurements for licensing, particularly in rivers supporting endangered salmon populations.

Given the high proportion of smolts entrained into the intake and the proximity of the HPP to the sea, turbine-related mortality at the observed levels may significantly reduce cohort survival. Mitigation actions focusing on reducing turbine passage are therefore essential for effective conservation and recovery of salmon in this basin.

Author Contributions: Conceptualization, F.J.S.-R. and F.J.B.-C.; methodology, F.J.B.-C., J.F.F.-P., and J.V.-C.; investigation, F.J.S.-R. and F.J.B.-C.; data acquisition, J.V.-C., J.d.M.-A., F.J.B.-C., and F.J.S.-R.; data curation, F.J.B.-C. and A.G.-V.; writing—original draft preparation, F.J.S.-R.; writing—review and editing, J.F.F.-P., J.V.-C., A.G.-V., J.d.M.-A., and F.J.B.-C.; project administration, F.J.S.-R. All authors have read and agreed to the published version of the manuscript.

Funding: This work has received funding from the project LIFE21-NAT-ES-LIFE KANTAU-RIBAI (Ref. 101074197) supported by the LIFE programme of the European Commission and the “III Agreement between Confederación Hidrográfica del Duero-ITAGRA-Universidad de Valladolid (BOE-A-2023-7044)”. Juan Francisco Fuentes-Pérez’s contribution was funded by the project RYC2022-0 36557-Ministry of Science, Innovation and Universities, and the Spanish Research Agency, through the State Plan for Scientific, Technical and Innovation Research 2021–2023 (MCIU/AEI/10.13039/501100011033), and co-financed by the European Social Fund Plus (FSE+).

Data Availability Statement: The original contributions presented in this study are included in the article. Further inquiries can be directed to the corresponding authors.

Acknowledgments: The authors would like to thank the Fish Management Service of the Government of Navarre and OREKAN for their support. José Manuel Checa Díaz-Maroto, consulting engineer in HGM S.A., helped us in the overview of Kaplan turbines in Spain. During the preparation of this manuscript, the authors used Gemini 3 pro and ChatGPT (OpenAI, GPT 5-2, November 2025) to assist with language editing, figure formatting, and the rephrasing of text. All scientific content, data analysis, and interpretation were performed by the authors. The authors have reviewed and edited the output and take full responsibility for the content of this publication.

Conflicts of Interest: The authors declare no conflicts of interest. The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript; or in the decision to publish the results.

References

1. Celestino, L.F.; Sanz-Ronda, F.J.; Miranda, L.E.; Makrakis, M.C.; Dias, J.H.P.; Makrakis, S. Bidirectional connectivity via fish ladders in a large Neotropical river. *River Res. Appl.* **2019**, *35*, 236–246. [\[CrossRef\]](#)
2. Fernandes Celestino, L.; Sanz-Ronda, F.J.; Miranda, L.E.; Cavicchioli Makrakis, M.; Dias, J.H.P.; Makrakis, S. Bidirectional connectivity via fish ladders in a large Neotropical river: Response to a comment. *River Res. Appl.* **2020**, *36*, 1377–1381. [\[CrossRef\]](#)
3. Lucas, M.C.; Baras, E.; Thom, T.J.; Duncan, A.; Slavík, O. *Migration of Freshwater Fishes*; Wiley Online Library: Oxford, UK, 2001.
4. Pracheil, B.M.; DeRolph, C.R.; Schramm, M.P.; Bevelhimer, M.S. A fish-eye view of riverine hydropower systems: The current understanding of the biological response to turbine passage. *Rev. Fish Biol. Fish.* **2016**, *26*, 153–167. [\[CrossRef\]](#)
5. Sanz-Ronda, F.J.; Fuentes-Pérez, J.F.; García-Vega, A.; Bravo-Córdoba, F.J. Fishways as Downstream Routes in Small Hydropower Plants: Experiences with a Potamodromous Cyprinid. *Water* **2021**, *13*, 1041. [\[CrossRef\]](#)
6. Schwevers, U.; Adam, B. *Fish Protection Technologies and Fish Ways for Downstream Migration*; Springer: Berlin/Heidelberg, Germany, 2020; Volume 279.

7. Mueller, M.; Knott, J.; Pander, J.; Geist, J. Experimental comparison of fish mortality and injuries at innovative and conventional small hydropower plants. *J. Appl. Ecol.* **2022**, *59*, 2360–2372. [[CrossRef](#)]
8. Aarestrup, K.; Jepsen, N.; Rasmussen, G.; Okland, F. Movements of two strains of radio tagged Atlantic salmon, *Salmo salar* L., smolts through a reservoir. *Fish. Manag. Ecol.* **1999**, *6*, 97–107. [[CrossRef](#)]
9. Jepsen, N.; Aarestrup, K.; Økland, F.; Rasmussen, G. Survival of radiotagged Atlantic salmon (*Salmo salar* L.)—and trout (*Salmo trutta* L.) smolts passing a reservoir during seaward migration. *Hydrobiologia* **1998**, *371*, 347–353. [[CrossRef](#)]
10. Karppinen, P.; Hynninen, M.; Vehanen, T.; Vähä, J. Variations in migration behaviour and mortality of Atlantic salmon smolts in four different hydroelectric facilities. *Fish. Manag. Ecol.* **2021**, *28*, 253–267. [[CrossRef](#)]
11. Cada, G.F.; Coutant, C.C.; Whitney, R.R. *Development of Biological Criteria for the Design of Advanced Hydropower Turbines*; EERE Publication and Product Library: Washington, DC, USA, 1997.
12. Brown, R.S.; Pflugrath, B.D.; Colotelo, A.H.; Brauner, C.J.; Carlson, T.J.; Deng, Z.D.; Seaburg, A.G. Pathways of barotrauma in juvenile salmonids exposed to simulated hydroturbine passage: Boyle’s law vs. Henry’s law. *Fish. Res.* **2012**, *121*, 43–50. [[CrossRef](#)]
13. Zhu, L.; Zhang, F.; Shi, X.; Adu-Poku, K.A.; Zhang, J.; Yuan, S. A systematic investigation on the damage characteristics of fish in axial flow pumps. *Processes* **2022**, *10*, 2228. [[CrossRef](#)]
14. Neitzel, D.A.; Dauble, D.D.; Čada, G.F.; Richmond, M.C.; Guensch, G.R.; Mueller, R.P.; Abernethy, C.S.; Amidan, B. Survival estimates for juvenile fish subjected to a laboratory-generated shear environment. *Trans. Am. Fish. Soc.* **2004**, *133*, 447–454. [[CrossRef](#)]
15. Pflugrath, B.D.; Harnish, R.A.; Rhode, B.; Engbrecht, K.; Beirao, B.; Mueller, R.P.; McCann, E.L.; Stephenson, J.R.; Colotelo, A.H. The susceptibility of Juvenile American shad to rapid decompression and fluid shear exposure associated with simulated hydroturbine passage. *Water* **2020**, *12*, 586. [[CrossRef](#)]
16. Radinger, J.; van Treeck, R.; Wolter, C. Evident but context-dependent mortality of fish passing hydroelectric turbines. *Conserv. Biol.* **2022**, *36*, e13870. [[CrossRef](#)] [[PubMed](#)]
17. Algera, D.A.; Rytwinski, T.; Taylor, J.J.; Bennett, J.R.; Smokorowski, K.E.; Harrison, P.M.; Clarke, K.D.; Enders, E.C.; Power, M.; Bevelhimer, M.S. What are the relative risks of mortality and injury for fish during downstream passage at hydroelectric dams in temperate regions? A systematic review. *Environ. Evid.* **2020**, *9*, 3. [[CrossRef](#)]
18. Čada, G.F. The development of advanced hydroelectric turbines to improve fish passage survival. *Fisheries* **2001**, *26*, 14–23. [[CrossRef](#)]
19. Dincer, I.; Ishaq, H. *Renewable Hydrogen Production*; Elsevier: Amsterdam, The Netherlands, 2021.
20. Ball, I.; Hendricks, D.; Jawaid, T.S.; Rutz, D.; Steller, J. *Small Hydropower Technologies—European State-of-the-Art Innovations*; WIP Renewable Energies: Munich, Germany, 2020.
21. Halder, P.; Doppalapudi, A.T.; Azad, A.K.; Khan, M.M.K. Chapter 7—Efficient hydroenergy conversion technologies, challenges, and policy implication. In *Advances in Clean Energy Technologies*; Azad, A.K.B.T.-A., Ed.; Academic Press: Cambridge, MA, USA, 2021; pp. 295–318. ISBN 978-0-12-821221-9.
22. CHD. *Consultoría y Asistencia Para la Inspección y Vigilancia del Cumplimiento del Condicionado de las Concesiones de Aprovechamientos Hidroeléctricos en la Confederación Hidrográfica del Duero*; Clave: 02.803.267/0811; Informe técnico.; Confederación Hidrográfica del Duero: Valladolid, Spain, 2011.
23. Checa-Díaz, J.M. (HGM, Madrid, Spain). Personal communication, 2025.
24. Sale, M.J.; Cada, G.F.; Carlson, T.J.; Dauble, D.D.; Hunt, R.T.; Sommers, G.L. *DOE Hydropower Program Annual Report for FY 2002 (DOE ID-11107)*; U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Wind and Hydropower Technologies: Washington, DC, USA, 2003.
25. Deng, Z.; Carlson, T.J.; Ploskey, G.R.; Richmond, M.C.; Dauble, D.D. Evaluation of blade-strike models for estimating the biological performance of Kaplan turbines. *Ecol. Modell.* **2007**, *208*, 165–176. [[CrossRef](#)]
26. Von Raben, K. Regarding the problem of mutilations of fishes by hydraulic turbines. *Die Wasserwirtsch.* **1957**, *4*, 97–100.
27. Montén, E. *Fish and Turbines: Fish Injuries During Passage Through Power Station Turbines*; Norstedts Tryckeri: Stockholm, Sweden, 1985.
28. Bosc, S.; Larinier, M. *Définition d’une Stratégie de Réouverture de la Garonne et de l’Ariège à la Dévalaison des Salmonidés Grands Migrateurs: Simulation des Mortalités Induites par les Aménagements Hydroélectriques lors de la Migration de Dévalaison*; Irstea: Toulouse, France, 2000.
29. Larinier, M.; Dartiguelongue, J. La circulation des poissons migrateurs: Le transit à travers les turbines des installations hydroélectriques. *Bull. Français La Pêche La Piscic.* **1989**, *312–313*, 1–87. [[CrossRef](#)]
30. Rutschmann, P.; Kampa, E.; Wolter, C.; Albayrak, I.; David, L.; Stoltz, U.; Schletterer, M. *Novel Developments for Sustainable Hydropower*; Springer Nature: Berlin/Heidelberg, Germany, 2022.
31. Russell, W.M.S.; Burch, R.L. *The Principles of Humane Experimental Technique*; Universities Federation for Animal Welfare (UFAW): Wheathampstead, UK, 1959.

32. MAPAMA. *Anuario de Aforos 2019–2020. Estación 1106 río Bidasoa en Endarlata*; Ministerio de Agricultura y Pesca Alimentación y Medio Ambiente: Madrid, Spain, 2023.
33. Horreo, J.L.; Machado-Schiaffino, G.; Griffiths, A.M.; Bright, D.; Stevens, J.R.; Garcia-Vazquez, E. Atlantic salmon at risk: Apparent rapid declines in effective population size in southern European populations. *Trans. Am. Fish. Soc.* **2011**, *140*, 605–610. [\[CrossRef\]](#)
34. Nicola, G.G.; Elvira, B.; Jonsson, B.; Ayllón, D.; Almodóvar, A. Local and global climatic drivers of Atlantic salmon decline in southern Europe. *Fish. Res.* **2018**, *198*, 78–85. [\[CrossRef\]](#)
35. García-Vega, A.; Fuentes-Pérez, J.F.; Bravo-Córdoba, F.J.; Elso, J.; Ardaiz-Ganuza, J.; Sanz-Ronda, F.J. Assessing Trends and Challenges: Insights from 30 Years of Monitoring and Management of Threatened Southern Atlantic Salmon Populations. *Aquat. Conserv. Mar. Freshw. Ecosyst.* **2025**, *35*, e70052. [\[CrossRef\]](#)
36. Sanz-Ronda, F.J.; Manzano, S.; Bravo-Córdoba, F.J.; Fuentes-Pérez, J.F.; García-Vega, A.; Valbuena-Castro, J. *Evaluación de la Mortalidad de la Fauna Piscícola Asociada al Descenso por Turbinas en Centrales Hidroeléctricas del río Bidasoa. Resultados Preliminares; Project LIFE21-NAT-ES-LIFE KANTAU-RIBAI (101074197); Internal Technical Report; ETSIIAA: Palencia, Spain, 2025.*
37. Government of Navarre Registro Ictiológico de Navarra (1978–2015). 2016; *Unpublished Database*.
38. Ballesteros, F.; Vázquez, V.M. Evaluación de las mortalidad de peces tras su paso por turbinas hidroeléctricas en ríos del norte de España. *Ecología* **2001**, *15*, 275–284.
39. Skalski, J.R.; Townsend, R.; Lady, J.; Giorgi, A.E.; Stevenson, J.R.; McDonald, R.D. Estimating route-specific passage and survival probabilities at a hydroelectric project from smolt radiotelemetry studies. *Can. J. Fish. Aquat. Sci.* **2002**, *59*, 1385–1393. [\[CrossRef\]](#)
40. Heisey, P.G.; Mathur, D.; D’Allesandro, L. A new technique for assessing fish passage survival at hydro power stations. In Proceedings of the Workshop on Fish Passage at Hydroelectric Developments, St. John’s, NL, Canada, 26–28 March 1993; pp. 32–38.
41. Tuononen, E.I.; Cooke, S.J.; Timusk, E.R.; Smokorowski, K.E. Extent of injury and mortality arising from entrainment of fish through a Very Low Head hydropower turbine in central Ontario, Canada. *Hydrobiologia* **2022**, *849*, 407–420. [\[CrossRef\]](#)
42. Salalila, A.; Martinez, J.; Tate, A.; Acevedo, N.; Salalila, M.; Deng, Z.D. Balloon Tag Manufacturing Technique for Sensor Fish and Live Fish Recovery. *J. Vis. Exp.* **2023**, *200*, e65632. [\[CrossRef\]](#)
43. Mathur, D.; Heisey, P.G.; Euston, E.T.; Skalski, J.R.; Hays, S. Turbine passage survival estimation for chinook salmon smolts (*Oncorhynchus tshawytscha*) at a large dam on the Columbia River. *Can. J. Fish. Aquat. Sci.* **1996**, *53*, 542–549. [\[CrossRef\]](#)
44. MyCircuits. The Sentinel Board. Available online: <https://github.com/MyCircuitsTV/Sentinel> (accessed on 17 September 2023).
45. Adafruit Industries. Adafruit BNO055 Absolute Orientation Sensor. Adafruit Industries. Available online: <https://learn.adafruit.com/adafruit-bno055-absolute-orientation-sensor> (accessed on 25 February 2020).
46. Becker, J.M.; Abernathy, C.S.; Dauble, D.D. *Identifying the Effects on Fish of Changes in Water Pressure During Turbine Passage*; EERE Publication and Product Library: Washington, DC, USA, 2003.
47. Fraser, R.; Deschênes, C.; O’Neil, C.; Leclerc, M. VLH: Development of a new turbine for very low head sites. In Proceedings of the 15th Waterpower, Chattanooga, TN, USA, 23–27 July 2007; Volume 10, pp. 23–26.
48. Martinez, J.J.; Deng, Z.D.; Titzler, P.S.; Duncan, J.P.; Lu, J.; Mueller, R.P.; Tian, C.; Trumbo, B.A.; Ahmann, M.L.; Renholds, J.F. Hydraulic and biological characterization of a large Kaplan turbine. *Renew. Energy* **2019**, *131*, 240–249. [\[CrossRef\]](#)
49. Mueller, M.; Pander, J.; Geist, J. Evaluation of external fish injury caused by hydropower plants based on a novel field-based protocol. *Fish. Manag. Ecol.* **2017**, *24*, 240–255. [\[CrossRef\]](#)
50. Boys, C.A.; Pflugrath, B.D.; Mueller, M.; Pander, J.; Deng, Z.D.; Geist, J. Physical and hydraulic forces experienced by fish passing through three different low-head hydropower turbines. *Mar. Freshw. Res.* **2018**, *69*, 1934–1944. [\[CrossRef\]](#)
51. Cook, T.C.; Hecker, G.E.; Faulkner, H.B.; Jansen, W. *Development of a More Fish-Tolerant Turbine Runner, Advanced Hydropower Turbine Project*; Worcester Polytechnic Inst.: Holden, MA, USA; Alden Research Lab.: Holden, MA, USA, 1997.
52. EPRI. *Fish Entrainment and Turbine Mortality Review and Guidelines*; Prepared by Stone & Webster Environmental Services; EPRI Report No. TR-101231, Project 2694-01; Electric Power Research Institute: Palo Alto, CA, USA, 1992.
53. Pflugrath, B.D.; Mueller, R.P.; Deters, K.A.; Watson, S.M.; Schneider, A.D.; Deng, Z.D. Maximizing Safe Passage for Large Fish: Evaluating Survival of Rainbow Trout Through a Novel Hydropower Turbine. *Environ. Sustain. Indic.* **2025**, *27*, 100801. [\[CrossRef\]](#)

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.